


Portable Battery



Welcome Guide

At a Glance

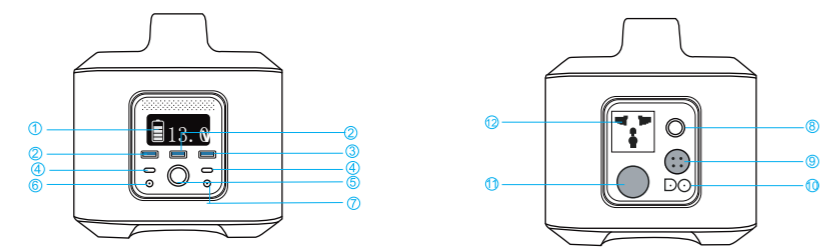


- ① LCD Screen
- ② USB Output Port
- ③ USB Quick Charge Output Port
- ④ Type C Output Port
- ⑤ DC Power Button
- ⑥ DC Output Port (12V/7A)
- ⑦ DC Output Port (12V/7A)
- ⑧ AC Power Button
- ⑨ DC In Charger Port
- ⑩ 30A Quick Charger
- ⑪ Cigarette Lighter Output Socket (12V)
- ⑫ AC Output Socket (220/110V)

Charge your device

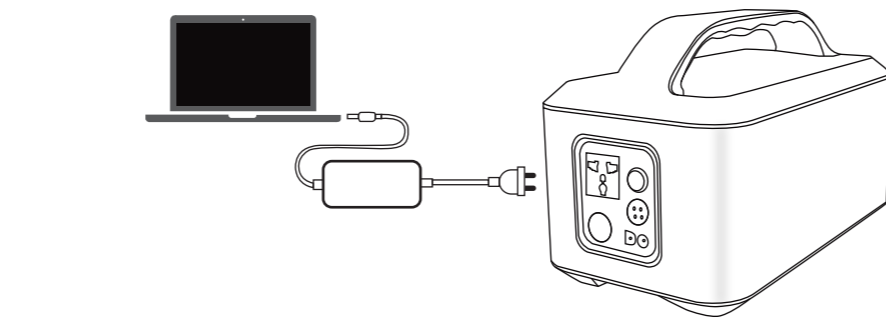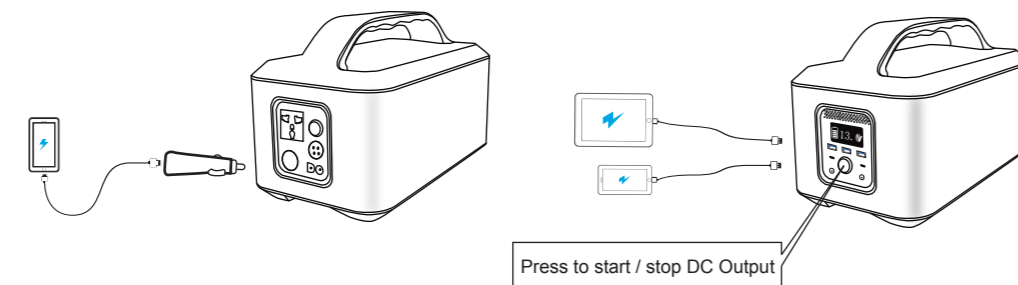


Press to start / stop AC Output

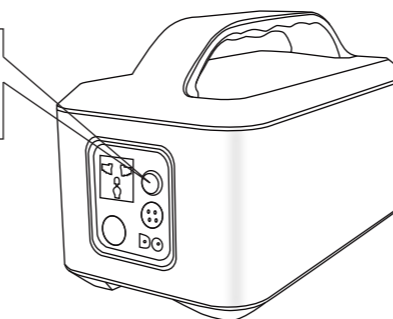


⚠ Power Station does not turn off automatically. Turn off each output by pressing its power button.

💡 If Power Station's total output exceeds 1000W, the AC port will automatically shut off. Ensure output is below 1000W then press the - AC output button to reset.

• Recharge your Power Station

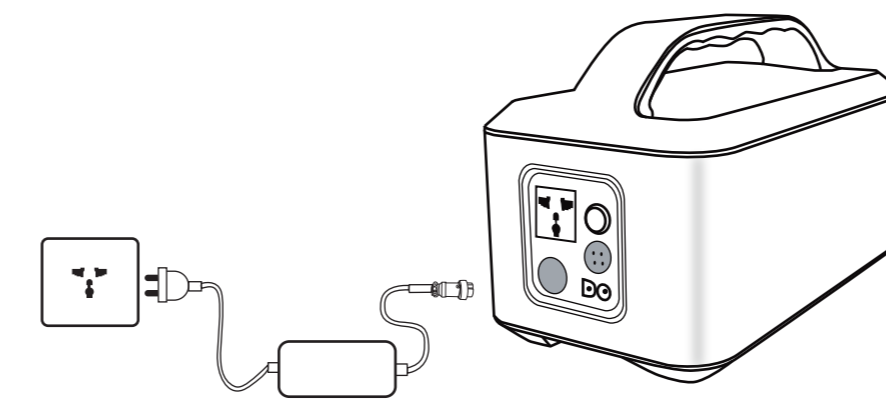

• Solar charger

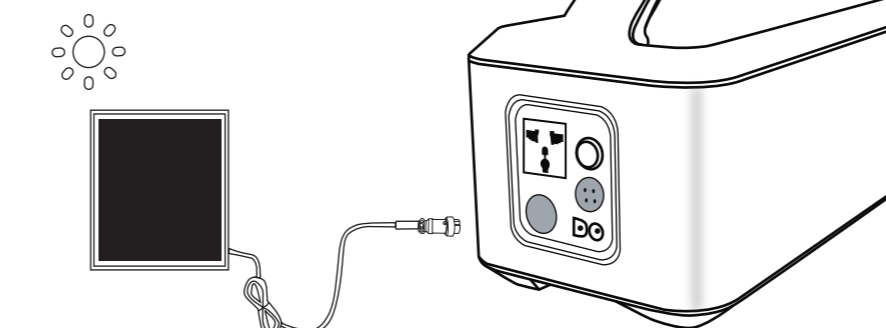

Specifications

Model Name	PS01
Capacity	1280Wh(12.8V 100Ah)
Cell Type	3.2V 100Ah LiFePO4 battery cells
Color Available	Grey and black
Weight	15.1Kg
Dimensions	368 x 200 x 275mm
Battery Life(Cycles)	About 2000 times
PCM	Temperature Control, Surge Protection, Short circuit protection
AC Output Mode	AC Output:110V 2.6A ,60HZ / 220V,2.2A,50HZ 1000W continuous 2000W surge peak
Battery Indicator	Digital LCD Screen
LED Light	Yes
USB 1	1 X Quick Charge 3.0 protocol support 5V/3A,9V/2A,12V/1.5A
USB 2	2x 5V, 2.1A (21W max)
Type C Port	2 X TYPE-C port(support PD protocol, single-track 5V-20V,max power 48W)
6mm DC and Cigarette lighter port	12V 10A (120W total)
DC Port	2XDC port (12V/7A)
Jumstart Interface	30A Quick Charger
Charging Port DC in	15V~20V Max 10A
Operation Temperature	-10~70 C
Certificate	CE,FCC,ROHS,UN38.3,MSDS

Attention

- Not permitted on aircraft
- To preserve battery lifespan, use and recharge at least once every 4 months
- Use original or certified cables

- Don't expose to liquids
- Don't disassemble
- Avoid dropping
- Avoid extreme temperatures
- Please dispose of batteries and electronic goods in accordance with local regulations

Customer Service

- 12-month limited warranty
- Lifetime technical support

