

Features of LiFePO4 Battery

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20 C~60 C.

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



Physical Dimension-mm



Dimension:
L151Xw99xH96mm
Color: Black


Typical Applications

- Solar/Wind Energy Storage
- Back-up Power for UPS/ EPS
- Telecommunication
- Low Speed Electric Vehicles
- Marine Boats
- DC Power Supply
- Auto Control System
- Power Tools
- Electric Toys


Specification

| | | |
|----------------------------|----------------------------------|---|
| Electrical Characteristics | Nominal Voltage | 12.8V |
| | Nominal Capacity | 9.9Ah |
| | Minimum Capacity | 9Ah |
| | Energy | 115.2Wh |
| | Cycle Life | >2000 cycles @0.5C 100%DOD |
| | Months Self Discharge | <3% |
| | Efficiency of Charge | 100% @0.5C |
| | Efficiency of Discharge | 96~99% @0.5C |
| | BMS Functions | Over charge, over discharge, over current, short circuit and temperature protection |
| Standard Charge | Charge Voltage | 14.6±0.2V |
| | Charge Mode | 0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV) |
| | Charge Current | 1.8A (can be customized) |
| | Max. Charge Current | 9A |
| | Charge Cut-off Voltage | 14.6V±0.2V |
| Standard Discharge | Max Continuous Discharge Current | 9A (can be customized) |
| | Peak Discharge Current | 18A |
| | Discharge Cut-off Voltage | 10V |
| Environmental | Charge Temperature | 0 °C to 55 °C (32F to 131F) @60±25% Relative Humidity |
| | Discharge Temperature | -20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity |
| | Storage Temperature | -20 °C to 45 °C (-4F to 113F) @60±25% Relative Humidity |
| | IP Class | IP65 |
| Mechanical | Plastic Case | ABS |
| | Approx. Dimensions | L151Xw99xH96mm |
| | Approx. Weight | 1.6kgs |


Different Rate Discharge Curve (25°C)

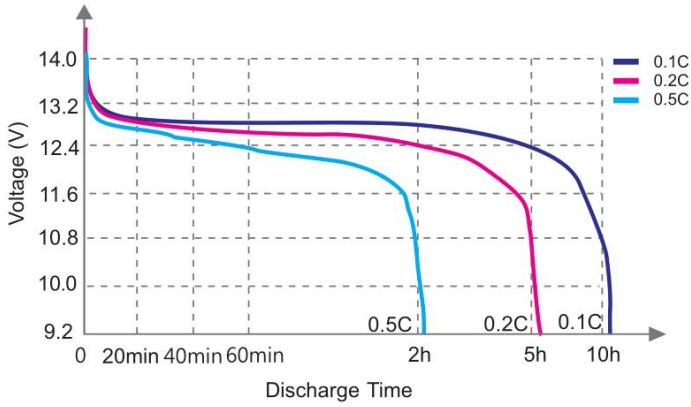


Different Temperature Discharge Curve (0.5C)

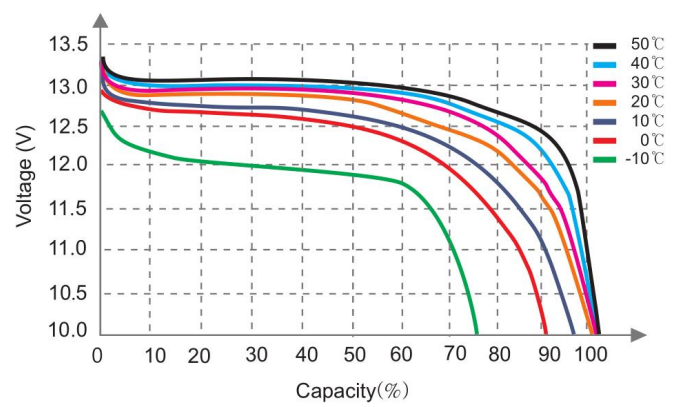


State of Charge Curve (0.5C, 25°C)

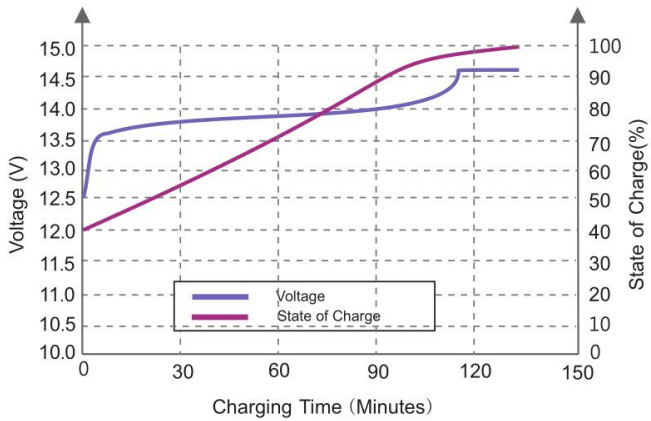

Charging Characteristics (0.5C, 25°C)

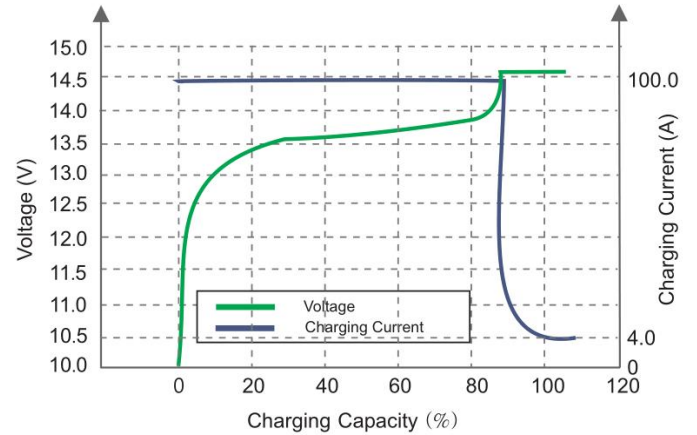

Different DOD Discharge Cycle Life Curve (0.5C)

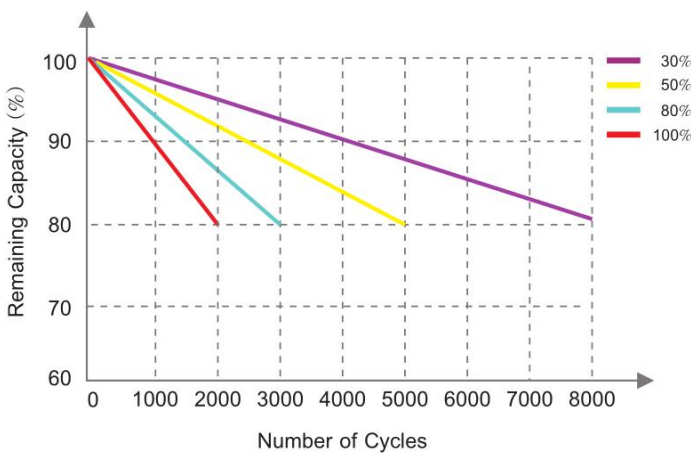

Different Temperature Self Discharge Curve

